



ROBOTIC
ASSISTANCE DEVICES

WALLY

A wall mounted version
of the popular SCOT device

Meet Wally! This wall mounted unit seamlessly integrates with all other RAD devices and provides edge-to-edge 180° field of vision. As easy to install and scale as other RAD hardware, Wally deploys RAD's innovative artificial intelligence-based technologies to enhance an organization's situational awareness, communication, and control. Wally takes full advantage of the RAD Software Suite and includes all of the features of RAD's SCOT tower in a smaller package that's ideal for corporate campuses, parking structures, exterior areas, and lobbies and buildings; anywhere that increased visibility is needed at a fraction of the cost.

- Cellular and WiFi connectivity
- 2 cameras providing a full 180° field of view
- Over-the-air software updates
- Customizable informational display that can feature text, images, and video
- High visibility RGB LEDs
- MAC Tracker™ capabilities through BOLO Technologies
- Human detection analytics with SuspectSpotter™
- License plate recognition with LicenseSpotter™
- 24/7 equipment monitoring from RAD through the Remote Monitoring Center
- Long-range audio paging
- Credential validation and access control
- Close-range video intercom
- Large tablet featuring security and concierge services, PLUS video conferencing with the SOC or guards in the field
- Security | Help | Panic button
- Standard 110v power requirement
- SPOT™, RAD's exclusive Face Mask Detection System available as part of RAD's Health Screening Option



Available With



Safety PreDetection Technology
for Face Mask Detection & Alerts

WALLY

Technical Information

WALLY WITH HEALTH SCREENING OPTION

Wally + Infrared Temperature Sensor & Health Screening Workflow

Allows end user to set a threshold of temperature of any visitors/employees wishing access to their facility.

End user adjustable health questionnaire includes taking subject's temperature.

High temperature or questionable answers can activate alert to secondary screening. Normal responses can unlock the door. Connect in real time via video call to a human with 1 button touch.

COMMUNICATION DETAILS



Standard - Cellular (no IT requirements)
Fair or better AT&T signal required
Verizon optional (extra cost)

Optional (no cost) - client WiFi
IT Requirements as follows:

-Inbound TCP connection: No ports need to be opened
-Outbound TCP Connections: 80, 443, 4445, 5938, 8822-8825
If UDP: 5938

Bandwidth requirements (range based on activity of each unit)
-SCOT: 1 - 5mpbs
-Wally: 300k - 1.5mpbs
Data Retention (summary - additional details available upon request):
-Full frame/high quality video: Approximately 15 days onboard SCOT/Wally
-Detection events: 1 year
-User activity: 1 year
-Setup details: Until deleted/modified

RAD software supports GDPR erasure requirements.

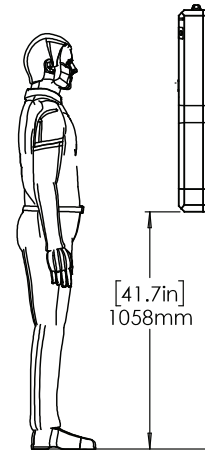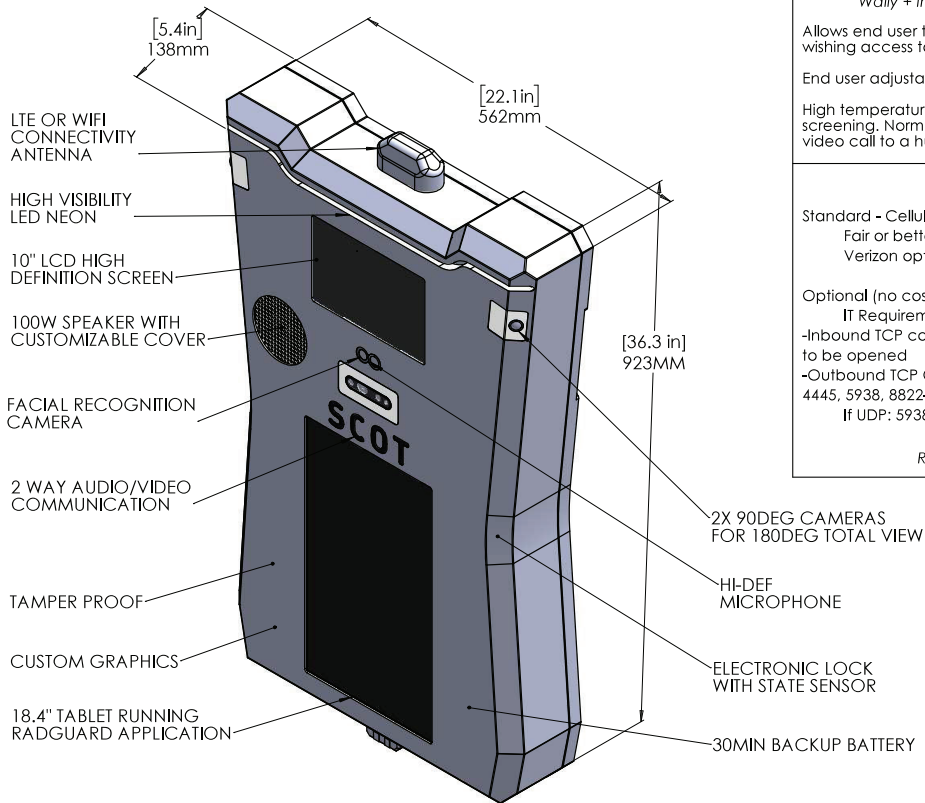

*CHECK LEAD TIMES FOR DELIVERY WITH RAD
**DETAILS SUBJECT TO CHANGE WITHOUT NOTICE

Available From



855-371-5300

www.gsgprotective.com



Details subject to change without notice.
ROBOTIC ASSISTANCE DEVICES, INC ©2020